




Patent
No.M417975
No.M419629



IK-618S-LV

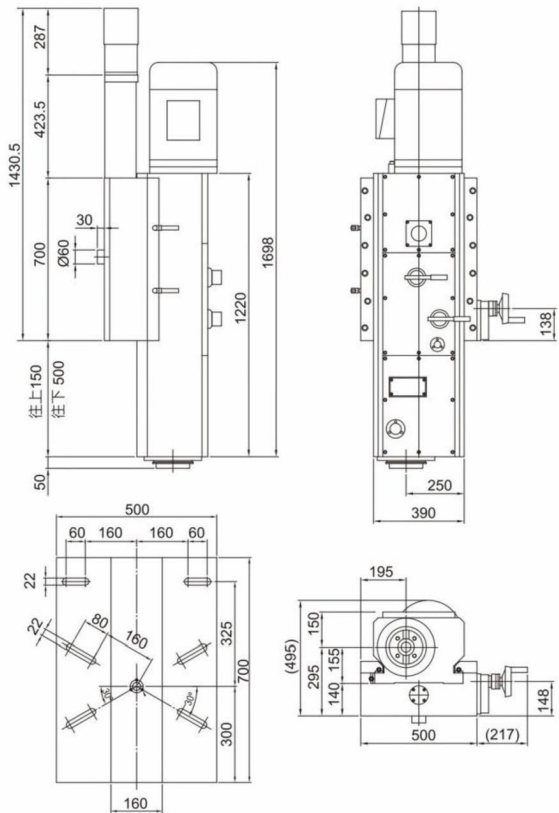

SPECIFICATION

MODEL	Unit	IK-618S-LV	
<u>Spindle</u>			
Spindle Bore Diameter		NT50	
Diameter of Spindle Nose	mm	Φ128.6	
Spindle Motor	Hp	12.5(4P)	15(4P)
Step of Spindle Speed	stage	6	
Spindle Speed (50Hz)	rpm	105	325
		166	450
		217	680
Spindle Speed (60Hz)	rpm	130	390
		200	540
		260	815
<u>Working Range</u>			
Max Diameter of Cutter	mm	200	
Travel	mm	650(up 150 /down 500)	
Rapid Travel AC Motor		0.75Kw/1Hp AC 3 Phase 4 Poles x 1/20	
Rapid Travel Speed	mm/min	358(50Hz) 428(60Hz)	
Reversal Slide		0.5mm/rev → ← 0.01mm	

※We reserve the right to modify the design and specifications without notice in advance.

<u>STANDARD ACCESSORIES</u>		
Spindle Motor	12.5HP / 4P	15HP / 4P
	●	-
	-	●
Rapid Travel AC Motor	●	
<u>OPTIONAL ACCESSORIES (APOLEGAMY)</u>		
Pneumatic Blade Locking Device	○	
Bearing Guide Screw	○	
Pneumatic Leveler	○	
IK-A90 Angular Head	○	
IK-D90 Deep Head	○	
IK-U90 Universal Head	○	
IK-U45 Universal Head	○	
Place of Origin	Taiwan	
Weight (Approximate)	kg	800
Warranty	1 year (non artificial mistake)	

※We reserve the right to modify the design and specifications without notice in advance.

