




IK-916-LV

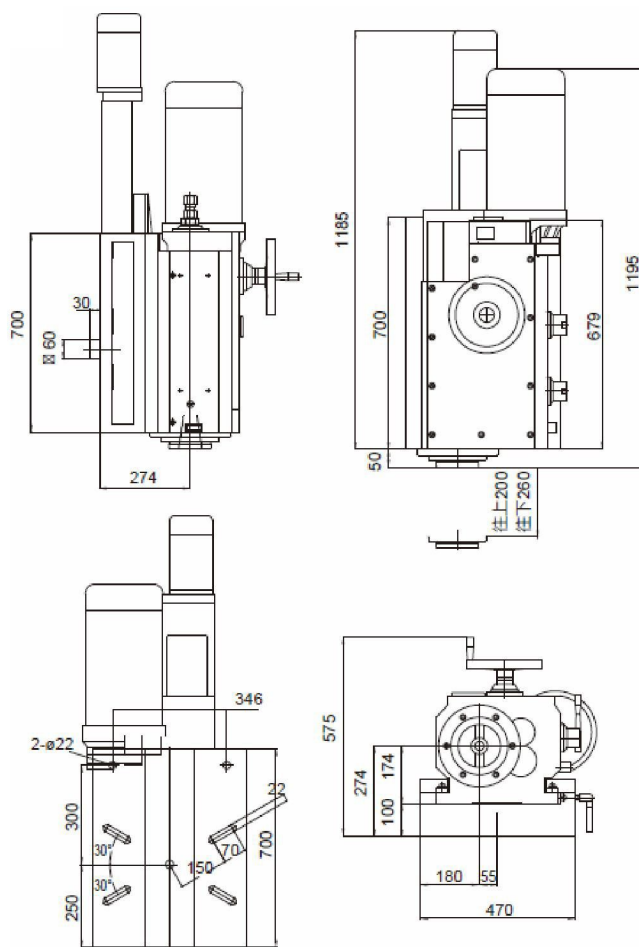

SPECIFICATION

MODEL	Unit	IK-916-LV			
<u>Spindle</u>					
Spindle Bore Diameter		NT50			
Diameter of Spindle Nose	mm	Φ128.6			
Spindle Motor	Hp	12.5(4P)		15(4P)	
Step of Spindle Speed	stage	9			
Spindle Speed (50Hz)	rpm		I	II	III
		A	66	375	166
		B	116	662	291
		C	83	493	216
Spindle Speed (60Hz)	rpm		I	II	III
		A	80	450	200
		B	140	795	350
		C	100	592	260
<u>Working Range</u>					
Max Diameter of Cutter	mm	250			
Travel	mm	460(up 200 /down 260)			
Rapid Travel AC Motor		0.4Kw/0.5Hp AC 3 Phase 4 Poles x 1/40			
Rapid Travel Speed	mm/min	177(50Hz) 218(60Hz)			
Reversal Slide		2mm/rev → ← 0.02mm			

※We reserve the right to modify the design and specifications without notice in advance.

STANDARD ACCESSORIES		
Spindle Motor	12.5HP / 4P	15HP / 4P
	●	-
	-	●
Rapid Travel AC Motor	●	
OPTIONAL ACCESSORIES (APOLEGAMY)		
Pneumatic Blade Locking Device	○	
Bearing Guide Screw	○	
Pneumatic Leveler	○	
IK-A90 Angular Head	○	
IK-D90 Deep Head	○	
IK-U90 Universal Head	○	
IK-N90 Angular Head	○	
IK-U45 Universal Head	○	
IK-E93-A Extend Head	○	
IK-E95-A Extend Head	○	
Place of Origin	Taiwan	
Weight (Approximate)	kg	558
Warranty	1 year (non artificial mistake)	

※We reserve the right to modify the design and specifications without notice in advance.