

ITEM	UNIT	SDC-1612	SDC-2212	SDC-3212
TRAVEL				
X-axis	mm	1600	2200	3200
Y-axis	mm		1200	
Z-axis	mm		800	
Spindle nose to table surface	mm		170~970 (BT-40) / 150~950 (BT-50)	
Distance between columns	mm		1300	
WORK TABLE				
Table size	mm	1600 x 1100	2200 x 1100	3100 x 1100
T-slot (W x No. x P)	mm		22 x 7 x 160	
Max. loading (average)	kg	3000	3500	4000
SPINDLE				
Max. spindle speed	RPM		10,000	
Drive type			Direct drive (Built-in type)	
Motor power output	kW		BT-40 : 11 / 15kW / BT-50 : 18.5 / 22kW	
Spindle taper			BT40 / BT50	
FEEDRATE				
Rapid traverse speed on X / Y / Z axes	M/min		24 / 24 / 24	
Max. cutting feedrate	M/min		10	
Servo motor of X / Y / Z	kW		7.5 / 4.5 / 4.5 (Mitsubishi) 7.0 / 4.0 / 4.0 (Fanuc)	
AUTOMATIC TOOL CHANGER				
Tool capacity	pcs		BT-40 : Disc type 30T / BT-50 : Chain type 32T	
ATC type			Arm type	
Max. tool diameter (w adjacent tool)	mm		Ø70 (BT-40) / Ø120 (BT-50)	
Max. tool diameter (w/o adjacent tool)	mm		Ø150 (BT-40) / Ø250 (BT-50)	
Max. tool length	mm		350 (BT-40) / 400 (BT-50)	
Max. tool weight	kg		7 (BT-40) / 16 (BT-50)	
OTHER				
Total required power	KVA		40	
Air pressure required			5~7	
Machine dimension (L x W x H)	mm	4883x4110x4150	6318 x 4100 x 4150	6883 x 4100 x 4150
Machine weight	kg	17000	19000	23000

* We reserve the right to modify the design and specifications without prior notice.

STANDARD EQUIPMENT

- Mitsubishi M80A controller
- Absolute position feedback on X, Y, Z axes
- Rigid tapping
- Twin counter-balancing
- Hydraulic cylinders
- Automatic lubrication system
- Spindle oil cooler
- Spindle air blast device
- MPG
- 3-color warning lamp
- RS-232 interface
- Heat exchanger for electrical cabinet
- Air gun and water gun
- Cooling system and coolant tank
- M30 auto power off
- Twin chip augers
- Link / chain type chip conveyor with cart
- Foundation bolts and blocks
- Tool box with tools

OPTIONAL EQUIPMENT

- Mitsubishi M830 controller
- Fanuc 0i-MF controller
- Fanuc 31-MB controller
- Siemens 640 controller
- Heidenhain TNC 640 controller
- Spindle taper BBT-50
- Spindle taper HSK-A63
- 12,000 rpm direct-drive spindle
- 8,000 rpm belt-drive spindle
- Build-in type spindle
- Column heighten up 100mm
- CTS 20 / 70 bar
- Air conditioner for electrical cabinet
- Transformer
- Intelligent voltage stabilizer
- Oil skimmer
- Heidenhain linear scale
- Automatic tool length measurement device (contact type / non-contact type)

SHINZAWA

震澤精密機械股份有限公司
Shinzawa Precision Machinery Co., Ltd.

專業精密機械設計製造 Precision Machinery Technology
42854 台中市大雅區大雅路三段537-1號
No. 537-1, Sec. 3, Daya Rd., Daya Dist., Taichung City 42854, Taiwan
TEL: +886-4-25690150 FAX: +886-4-25690165
Email: info-cnc@shinzawa.com.tw
http://www.shinzawa.com.tw

2021/05



CE

www.shinzawa.com.tw

A NEW GENERATION OF HIGH SPEED DOUBLE COLUMN MACHINING CENTER

This machine features optimal cost-to-performance ratio. All models in this series have a modular design and an enhanced machine structure, exhibiting high speed, high precision cutting performance and increased machine stability. These machines can fully satisfy the requirements for precise complex surface machining and mold machining in various industries. The SDC series could be widely applied to the high-tech industries such as: aerospace, automotive and motorcycle, energy, electronics and transportation.



HIGHLY RIGID MACHINE STRUCTURE

- The massive base is a box type structure in combination with internal rib reinforcement. Employs 55mm high rigidity roller type linear ways and one grade increased Ø63mm ballscrews. These provide a dependable foundation to ensure high accuracy in high speed machining.
- The oversized columns are of honeycomb structure with higher stability than others. This also provides better geometric accuracy maintaining capacity compared to conventional structures. The columns and the cross beam are one-piece fabricated. The contact surfaces of all parts have been scraped for higher accuracy of the machine, which in turn provides the best dynamic and static rigidity.
- The joint parts among the saddle, spindle head and cross beam are of stepped structure (top/side) design, which helps to boost stability when the Y axis moves at a high speed, reducing vibration and tilting forward to enhance the high speed cutting rigidity of the spindle. This results in higher machining accuracy.
- All machine parts are subjected to analyze by using the Finite Element Method (FEM), which provides a light configuration after assembling, while ensuring the optimal rigidity of the machine.
- The table is box-type structure with rib reinforcement to increase loading stability and machining accuracy.
- The series of machine is manufactured from high durability cast iron (FC-300), and they are assembled after high precision grinding and scraping.

BUILT-IN TYPE SPINDLE WITH HIGH POWER

- Standardly equipped 10,000 rpm BT50 direct-drive spindle.
- The high speed, high rigidity spindle is suitable for high speed and high precision machining needs on molds.
- The spindle is supported by high precision, large ceramic bearings, providing outstanding axial and radial cutting rigidity (direct-drive type).
- The powerful built-in type spindle 20000rpm provides power output of 15/18.5kW and maximum torque of 118Nm.




THREE AXES BALLSCREWS DIRECTLY COUPLED TO MOTORS

- Employs a powerful axial servomotor to directly drive the highly rigid ballscrew with double nuts, pretension treated by thermal growth in advance to upgrade positioning accuracy.
- Three axes transmission and end supports on all machine models are completely scraped to achieve the actual geometric surfaces.
- Specially designed forced positioning restriction on axis.
- Rapid traverse rates on three axes (X/Y/Z): 24/24/24 m/min



STEPPED STRUCTURE ON Y-AXIS WITH TWO LINEAR WAYS


The saddle, saddle slideways and the cross beam are compactly constructed with 90° design, allowing them to resist axial and radial tensile force, shear force, and various pressure fluctuations.



PRACTICAL, DEPENDABLE CONTROL FUNCTION



- The improved operation panel meets CE regulations with elegant outlook.
- The seat type operation box makes operation free.

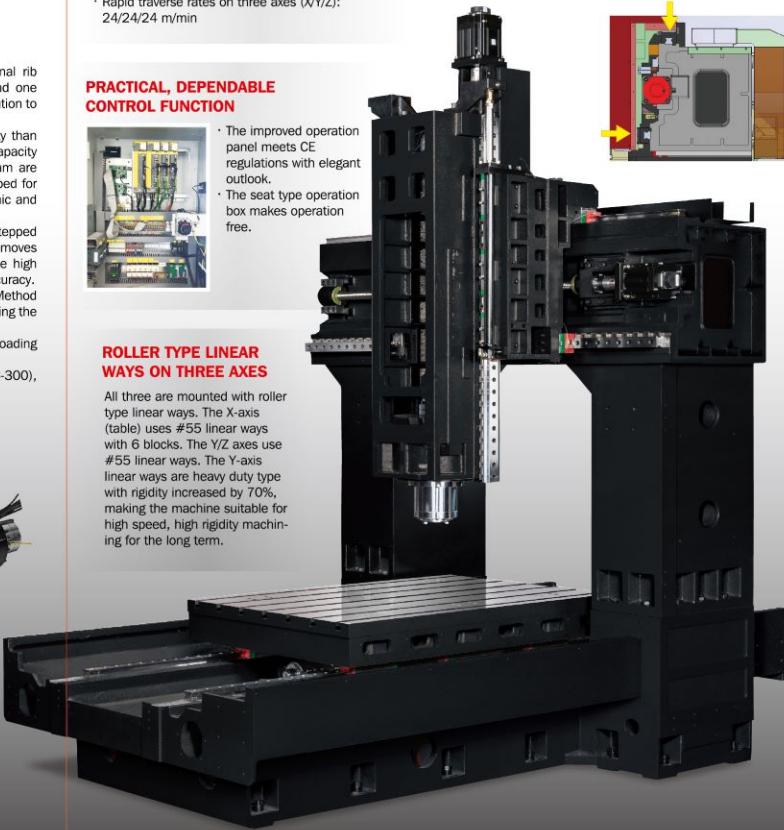

ROLLER TYPE LINEAR WAYS ON THREE AXES

All three are mounted with roller type linear ways. The X-axis (table) uses #55 linear ways with 6 blocks. The Y/Z axes use #55 linear ways. The Y-axis linear ways are heavy duty type with rigidity increased by 70%, making the machine suitable for high speed, high rigidity machining for the long term.